

03-13-00

A

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 001340.P021Total Pages 2First Named Inventor or Application Identifier Cecilia Galarza et al.Express Mail Label No. EL234215099US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D. C. 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. x Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. x Specification (Total Pages 57)
(preferred arrangement set forth below)
 - Descriptive Title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claims
 - Abstract of the Disclosure
3. x Drawings(s) (35 USC 113) (Total Sheets 6)
4. x Oath or Declaration (Total Pages 5)
 - a. x Newly Executed (Original or Copy)
 - b. Copy from a Prior Application (37 CFR 1.63(d))
(for Continuation/Divisional with Box 17 completed) (**Note Box 5 below**)
 - i. DELETIONS OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)



7. _____ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. _____ Computer Readable Copy
b. _____ Paper Copy (identical to computer copy)
c. _____ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. X Assignment Papers (cover sheet & documents(s))
9. _____ a. 37 CFR 3.73(b) Statement (where there is an assignee)
_____ b. Power of Attorney
10. _____ English Translation Document (if applicable)
11. _____ a. Information Disclosure Statement (IDS)/PTO-1449
_____ b. Copies of IDS Citations
12. _____ Preliminary Amendment
13. X Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. _____ a. Small Entity Statement(s)
_____ b. Statement filed in prior application, Status still proper and desired
15. _____ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. X Other: Copy of postcard with Express mail label

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

____ Continuation ____ Divisional ____ Continuation-in-part (CIP)
of prior application No: _____


18. Correspondence Address

____ Customer Number or Bar Code Label _____
(Insert Customer No. or Attach Bar Code Label here)
or

 X Correspondence Address Below

NAME Florin Corie-Reg. No.: P46,244

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP


3/10/2000

ADDRESS 12400 Wilshire Boulevard

Seventh Floor

CITY Los Angeles

STATE California

ZIP CODE 90025-1026

Country U.S.A.

TELEPHONE (408) 720-8300

FAX (408) 720-9397

EXPRESS MAIL CERTIFICATE OF MAILING

jc525 U.S. PTO
09/523065
03/10/00

"Express Mail" mailing label number: EL234215099US

Date of Deposit: 3/10/2000

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

Michelle Offenbaker

(Typed or printed name of person mailing paper or fee)

Michelle Offenbaker

(Signature of person mailing paper or fee)

3/10/2000

(Date signed)

EL234215099US

Serial/Patent No.: unassigned Filing/Issue Date: March 10, 2000
Client: Voyan Technology
Title: METHOD FOR AUTOMATED SYSTEM IDENTIFICATION

BSTZ File No.: 001340 P021 Atty/Secty Initials: DJM/FAC/mro
Date Mailed: 3/10/2000 Docket Due Date: _____

The following has been received in the U.S. Patent & Trademark Office on the date stamped hereon:

- | | | |
|--|--|--|
| <input type="checkbox"/> Amendment/Response (____ pgs.) | <input checked="" type="checkbox"/> Express Mail No. <u>EL234215099US</u> | <input checked="" type="checkbox"/> Check No. <u>34183</u> |
| <input type="checkbox"/> Appeal Brief (____ pgs.) (in triplicate) | <input type="checkbox"/> _____ Month(s) Extension of Time | Amt: <u>\$ 4000</u> |
| <input checked="" type="checkbox"/> Application - Utility (<u>57</u> pgs., with cover and abstract) | <input type="checkbox"/> Information Disclosure Statement & PTO-1449 (____ pgs.) | <input checked="" type="checkbox"/> Check No. <u>34191</u> |
| <input type="checkbox"/> Application - Rule 1.53(b) Continuation (____ pgs.) | <input type="checkbox"/> Issue Fee Transmittal | Amt: <u>\$ 3732.00</u> |
| <input type="checkbox"/> Application - Rule 1.53(b) Divisional (____ pgs.) | <input type="checkbox"/> Notice of Appeal | |
| <input type="checkbox"/> Application - Rule 1.53(b) CIP (____ pgs.) | <input type="checkbox"/> Petition for Extension of Time | |
| <input type="checkbox"/> Application - Rule 1.53(d) CPA Transmittal (____ pgs.) | <input type="checkbox"/> Petition for _____ | |
| <input type="checkbox"/> Application - Design (____ pgs.) | <input checked="" type="checkbox"/> Postcard | |
| <input type="checkbox"/> Application - PCT (____ pgs.) | <input type="checkbox"/> Power of Attorney (____ pgs.) | |
| <input type="checkbox"/> Application - Provisional (____ pgs.) | <input type="checkbox"/> Preliminary Amendment (____ pgs.) | |
| <input checked="" type="checkbox"/> Assignment and Cover Sheet | <input type="checkbox"/> Reply Brief (____ pgs.) | |
| <input type="checkbox"/> Certificate of Mailing | <input type="checkbox"/> Response to Notice of Missing Parts | |
| <input checked="" type="checkbox"/> Declaration & POA (<u>5</u> pgs.) | <input type="checkbox"/> Small Entity Declaration for Indep. Inventor/Small Business | |
| <input type="checkbox"/> Disclosure Docs & Orig & Copy of Invention Signed Letter (____ pgs.) | <input checked="" type="checkbox"/> Transmittal Letter, in duplicate | |
| <input checked="" type="checkbox"/> Drawings: <u>6</u> # of sheets includes <u>7</u> figures | <input checked="" type="checkbox"/> Fee Transmittal, in duplicate | |

☒ Other: Copy of Postcard with Express Mail Label

UNITED STATES PATENT APPLICATION
FOR
METHOD FOR AUTOMATED SYSTEM IDENTIFICATION

INVENTORS:

CECILIA GALARZA

DAN HERNANDEZ

MARK ERICKSON

PREPARED BY:

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP
12400 WILSHIRE BOULEVARD
SEVENTH FLOOR
LOS ANGELES, CA 90025-1026


(408) 720-8300

"Express Mail" mailing label number EL 234215099US

Date of Deposit: 3/10/2000

I hereby certify that I am causing this paper or fee to be deposited
with the United States Postal Service "Express Mail Post Office to
Addressee" service on the date indicated above and is addressed to
the Commissioner of Patents and Trademarks, Washington, D.C.
20231

Michelle Offenbaker
(Typed or printed name of person mailing paper or fee)

 3/10/2000
(Signature of person mailing paper or fee) Date

METHOD FOR AUTOMATED SYSTEM IDENTIFICATION

FIELD OF THE INVENTION

The present invention relates generally to system identification and,
5 more particularly, to a method for automated system identification of dynamic systems.

BACKGROUND OF THE INVENTION

The design and manufacture of new products has become an increasingly complex activity due to the high performance required by the
10 users of such products. Therefore, many products are designed to incorporate high performance signal processing and/or control schemes. The methods used in designing high performance signal processing and/or control schemes require mathematical models of the systems under consideration. Control and signal processing engineers construct these mathematical models using
15 established modeling methods.

One family of methods for constructing models is known as system identification. In order to use system identification methods, system designers must rely on data gathered from experiments conducted on the system under consideration, as well as on prior knowledge of the behavior of the system.
20 Most system identification methods are iterative and seek to improve model accuracy through repeated experiments and numerical computations. The resulting accurate models can be used to design high performance signal processing and/or control schemes for the systems under consideration.

An example where system identification is used is in communication
25 systems. A key component of any analog or digital communication system is a communications channel. The communications channel is the medium through which a signal is transmitted and received. For a Digital Subscriber Line (DSL), the channel may include the analog transmitter electronics, the copper wiring that connects the central office and the customer modem, and the analog
30 receiver electronics. For a wireless communications system, the channel may

include the analog transmitter electronics, transmitting antenna, electromagnetic propagation to the receiving antenna, the receiving antenna itself, and analog receiver electronics. Accurate channel models play a critical role in analyzing and designing communications systems.

5 Several system identification methods are available to system designers. Many of these methods are encoded in existing system identification software tools. A typical example of a system identification tool is MATLAB® System Identification Toolbox, available from Mathworks, Inc., Natick, Massachusetts, which is a state-of-the-art system identification package having a graphical user
10 interface (GUI). To successfully use the MATLAB® System Identification Toolbox, the control system designer must interpret results and make numerous complex decisions in the areas of identification experiment design and refinement, experimental data quality analysis, and model quality analysis. These system identification tools thus require experienced users with specific
15 expertise in system identification theory. In addition, these methods leave the construction and refinement of system identification experiments up to the user.

 Therefore, what is needed is a tool for the identification of dynamic systems that automates the entire identification process. Further, the tool
20 should require little or no specific knowledge of system identification theory from the control system designer who uses it.

SUMMARY OF THE INVENTION

A method for automated system identification is disclosed. A model structure is selected and reference signal values are generated for input into the system. Input signal values and output signal values are retrieved from the
5 system and system identification is performed on the model structure using the input signal values, the output signal values, and the reference signal values. A point model, obtained as a result of the system identification, is then verified for accuracy.

Other features and advantages of the present invention will be apparent
10 from the accompanying drawings, and from the detailed description, which follow below.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

5 Figure 1 shows an exemplary closed loop data acquisition system architecture.

Figure 2 shows an exemplary open loop data acquisition system architecture.

10 Figure 3 is a flowchart representing the method for automated system identification.

Figure 4 is a flowchart representing one embodiment of the process of preparation for point modeling.

Figure 5 is a flowchart representing one embodiment of the process of generation of reference trajectories and data collection.

15 Figure 6 is a flowchart representing one embodiment of the process of detection and removal of outliers.

Figure 7 is a flowchart representing one embodiment of the process of verification of the model accuracy.

DETAILED DESCRIPTION

A method for automated system identification is described. In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be evident, however, to one skilled in the art that the present invention may be practiced without these specific details.

In some instances, well-known structures and devices are shown in block diagram form, rather than in detail, in order to avoid obscuring the present invention. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical, electrical and other changes may be made without departing from the scope of the present invention.

Some portions of the detailed descriptions that follow are presented in terms of algorithms and symbolic representations of operations on data bits within a computer memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a self-consistent sequence of acts leading to a desired result. The acts are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussion, it is appreciated that

throughout the description, discussions utilizing terms such as "processing" or "computing" or "calculating" or "determining" or "displaying" or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

The present invention can be implemented by an apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may comprise a general purpose computer, selectively activated or reconfigured by a computer program stored in the computer. Such a computer program may be stored in a computer readable storage medium, such as, but not limited to, any type of disk including floppy disks, optical disks, CD-ROMs, and magnetic-optical disks, read-only memories (ROMs), random access memories (RAMs), EPROMs, EEPROMs, magnetic or optical cards, or any type of media suitable for storing electronic instructions, and each coupled to a computer system bus.

The algorithms and displays presented herein are not inherently related to any particular computer or other apparatus. Various general purpose systems may be used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatus to perform the required method. For example, any of the methods according to the present invention can be implemented in hard-wired circuitry, by programming a general purpose processor or by any combination of hardware and software. One of skill in the art will immediately appreciate that the invention can be practiced with computer system configurations other than those described below, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers, and the like. The invention can also be practiced in

distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. The required structure for a variety of these systems will appear from the description below.

5 The methods of the invention may be implemented using computer software. If written in a programming language conforming to a recognized standard, sequences of instructions designed to implement the methods can be compiled for execution on a variety of hardware platforms and for interface to a variety of operating systems. In addition, the present invention is not described
10 with reference to any particular programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings of the invention as described herein. Furthermore, it is common in the art to speak of software, in one form or another (e.g., program, procedure, application...), as taking an action or causing a result. Such expressions are
15 merely a shorthand way of saying that execution of the software by a computer causes the processor of the computer to perform an action or produce a result.

Figure 1 shows an exemplary closed loop data acquisition system architecture 100. In one embodiment, the present invention is described in connection with closed loop system identification. Alternatively, the present
20 invention may be implemented with open loop system identification. However, closed loop system identification should be used when the system to be identified is unstable.

Referring to Figure 1, a system 110 is instrumented to provide injection of a reference signal r and automatic collection of input signals u and output
25 signals y . In one embodiment, the reference signal r , also known as excitation signal or reference trajectory, is injected at the input of system 110. Alternatively, the reference signal r may be injected at the output of system 110. The distinction between reference signal r and input signal u is provided for closed loop identification purposes. In one embodiment, the reference signal r
30 resides in a table or data file 150 and is injected using a computer interface 130.

Conversely, input signals u and output signals y are collected and stored in a separate table or data file 140 using the same computer interface 130. In this embodiment, the controller 120 is provided to control the system 110.

Figure 2 shows an exemplary open loop data acquisition system architecture 200. Referring to Figure 2, a system 210 is instrumented to provide injection of a reference signal r and automatic collection of input signals u and output signals y . In one embodiment, the reference signal r is injected at the input of system 210. In contrast to closed loop identification, in the case of open loop identification, the reference signal r and the input signal u are identical. In one embodiment, the reference signal r resides in a table or data file 250 and is injected using a computer interface 230. Conversely, input signals u and output signals y are collected and stored in a separate table or data file 240 using the same computer interface 230.

Figure 3 is a flowchart representing one embodiment of the method for automated system identification of linear systems. According to one embodiment, a system user or designer specifies a list of operating conditions. For example, in the case of identification of a disk drive, the user may specify a temperature, a vibration condition, a track number, a surface number, and a drive number. The user may also provide information about the sampling frequency and the desired frequency bandwidth covered by a prospective model.

Referring to Figure 3, at step 310, a list of point models to be identified is constructed from the list of operating conditions provided by the user. At step 320, during preparation for point modeling, each model is set up as described in detail below and as illustrated in Figure 4.

Subsequent to the preparation for point modeling, a decision is made at step 330 concerning the qualification of the system. If the system is qualified, based on system qualification tests described below in connection with Figure 4, then reference trajectories are generated and data is collected at step 340. If the system is not qualified, then the procedure is terminated.

At step 340, reference signals or trajectories are generated and data is collected as described in further detail below in connection with Figure 5.

At step 350, outliers are detected and subsequently cleaned or removed. One embodiment of the process of detection and removal of outliers is described in further detail below in connection with Figure 6.

Next, a decision is made at step 360 whether a sufficient amount of clean data is available for further processing. If the removal of outliers was successful, but the number of removed values exceeds a predetermined percentage of the number of stored output signal values, data is discarded and steps 340 and 350 are repeated. Once sufficient clean data is available, point model identification is performed at step 370. One embodiment of the point model identification procedure will be described in further detail below.

At step 380, uncertainty coefficients are computed, wherein the coefficients correspond to transfer functions identified during the point model identification performed at step 370.

At step 390, a decision is made whether the model obtained is accurate. In one embodiment, a model qualification procedure is performed. One embodiment of the model qualification procedure will be described in further detail below in connection with Figure 7.

Finally, a refinement of the identification experiment is performed at step 395. Once the model is assessed as accurate at step 390, the entire process is repeated for each point model in the point model list.

In alternate embodiments, the order of the steps to be performed may be modified without departing from the scope of the present invention. Similarly, it is to be understood by a person of ordinary skill in the art that some steps may be eliminated or made available as optional features.

In one embodiment, the present invention is implemented in connection with a supervisory decision entity, which is periodically called to make complex decisions and interpret results of different steps of the method shown in the flowchart of Figure 3. In one embodiment, the decision entity is a Real-

Time Planner (not shown). The Real-Time Planner is described in detail in U.S. Patent Application Serial No. 09/345,172, filed June 30, 1999, entitled Real-Time Planner for Design, to Sunil C. Shah, Pradeep Pandey, Thorkell Gudmundsson, and Mark Erickson, and assigned to Voyan Technology Corporation of Santa Clara, California. Alternatively, another software application may be provided to make the required complex decisions. In another alternate embodiment, the user may interpret the results and make supervisory decisions.

Preparation for Point Modeling

The preparation for point modeling and model setup performed at step 320 in Figure 3 will now be described in further detail. Figure 4 is a flowchart representing one embodiment of the process of preparation for point modeling. Referring to Figure 4, once the user specifies the list of operating conditions, system qualification tests are run at step 410.

In one embodiment, a test is run to assess if the system satisfies the linearity assumptions. Particularly for the closed loop identification illustrated in Figure 1, the test may verify that the controller 120 is not introducing undesirable non-linearities. For example, a first reference signal r is initially injected. Subsequently, a second version of it, scaled by a predetermined factor, is also injected. If the closed loop system 100 is linear, the resulting output signals y must be scaled by the same factor. Alternatively, other qualification tests may be run, for example a quick reference trajectory improvement may be performed, and predicted and actual output signals y may be subsequently compared. In Figure 4, at step 420, a system qualification cost vector is computed as a result of the system qualification tests. The cost vector is further used to decide whether the system qualifies for application of the method.

Generally, the present invention may be implemented with any linear model structure. A list of linear model structures is presented in L. Ljung, *System Identification for the User*, Prentice Hall, 1999. Bias of the model should be taken into consideration when selecting an appropriate model structure. Biased models may arise when the model structure is not sufficiently rich or when a

cost function associated with the model structure does not have a unique global minimum and, instead, presents several local minima. Model structures that may be used for identification include finite impulse response (FIR), autoregressive with external input (ARX), autoregressive moving average with external input (ARMAX), autoregressive moving average (ARMA), autoregressive autoregressive with external input (ARARX), autoregressive autoregressive moving average with external input (ARARMAX), output error (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

As shown in the flowchart of Figure 4, at step 430 a cost vector is simultaneously computed for each available model structure. A model structure is subsequently selected at step 440 based on the computed cost vector.

Each known model structure has an associated cost vector, which can be computed based on several cost variables. Among the cost variables to be considered in the process of computing the cost vector are: a risk of local minima factor (r.l.m.), which depends on the type of system or physical plant; a computational cost factor (c.c.), which is a characteristic of the particular model structure; and an equipment time factor (e.t.), which is related to the number of identification experiments necessary to obtain accurate models. In one embodiment, the cost vector is passed to the real-time planner, which selects the appropriate model structure. Alternatively, the designer may select the model structure based on the calculated cost vector.

Referring to Figure 4, once the model structure is selected at step 440, a model order is selected at step 450. Additional model parameters, such as an input signal delay or a disturbance model order, are selected at step 460. The model order selection is performed following the procedure described in detail in U.S. Patent Application Serial No. 09/345,640, filed June 30, 1999, entitled Model Error Bounds for Identification of Stochastic Models for Control Design, to Sunil C. Shah, and assigned to Voyan Technology Corporation of Santa

Clara, California. The selected model order may be revised according to the outcome of model qualification tests described in further detail below.

At the same time, identification experiments are defined at step 470 and experimental parameters are obtained at step 480. In one embodiment, one or more operating conditions are specified for the model structure selected. At the same time, a sampling frequency and a frequency bandwidth covered by the model structure are also provided. The identification experiments are then defined based on the operating conditions, the sampling frequency, and the frequency bandwidth of the model structure.

In one embodiment, the system identification of a point model can be performed subsequent to one or more identification experiments, depending on the number of input signals u and output signals y , as well as on the experimental setup available and the length of data required by the model structure to obtain an accurate model. In the embodiment shown in Figure 1, table or data file 150 contains the reference signal r , also known as excitation signal or reference trajectory. Data collected during the identification experiment, such as input signals u and output signals y , is stored in table or data file 140. System input and output identifiers, as well as any other experiment-specific parameters, may be stored in a separate table or data file (not shown). Finally, a header file may store the plant input and output identifiers, as well as other experiment-specific parameters.

A quiet run is defined as an identification experiment having a table or data file 150 containing a null reference signal r . Similarly, an excited run corresponds to an identification experiment having a non-zero excitation signal r . In one embodiment, an identification experiment corresponding to an excited run contains information on a predetermined frequency region only. As a result, the total frequency bandwidth, initially specified by the user, is separated into several excited runs according to the maximum duration of each identification experiment.

Qualification of the System

Subsequent to the preparation for point modeling, a decision is made concerning the qualification of the system performed at step 330 in Figure 3. In one embodiment, the real-time planner decides whether the system is qualified or not. Alternatively, the decision may be made by another software application or by the system designer. If the system qualifies, then reference trajectories are generated and data is collected. If the system does not qualify, then the procedure is terminated.

Generation of Reference Trajectories and Data Collection

The generation of reference signals or trajectories and data collection, performed at step 340 in Figure 3, will now be described in further detail. Figure 5 is a flowchart representing one embodiment of the process of generation of reference trajectories and data collection.

As illustrated in the flowchart of Figure 5, the model parameters and the experimental parameters, obtained at steps 450, 460 and 480 shown in Figure 4, are used to create reference signals r at step 510. In one embodiment, this step creates tables or data files 140 and 150 containing data corresponding to all identification experiments for a point model. In order to create a reference signal or trajectory r , a large output signal-to-noise ratio must be obtained and linear operation regime must be guaranteed for the point model.

In one embodiment, chirp signals may be used as reference signals. In this embodiment, the envelope of an output signal is retrieved and divided by the envelope of a corresponding chirp signal in order to estimate an input/output gain. Subsequently, to obtain a new chirp signal envelope, a desired output level is divided by the calculated input/output gain. The resulting chirp signal is conditioned to account for possible non-linear effects, such as system-input saturation and system-input slew-rate limits.

Alternatively, other signals may be used as reference signals, such as pseudo-random binary sequence signals, a sum of sinusoids, or wavelets. The creation of reference trajectories is disclosed in further detail in U.S. Patent Application Serial No. 09/345,640, filed June 30, 1999, entitled Model Error

Bounds for Identification of Stochastic Models for Control Design, to Sunil C. Shah, and assigned to Voyan Technology Corporation of Santa Clara, California. The reference signals are stored in table or data file 150 at step 520.

As shown in the flowchart of Figure 5, identification experiments are performed at step 530. The chirp signal is injected into the system 110 and, as a result, the input signals u and output signals y are collected and stored in table or data file 140 at step 540. The process of generation of reference trajectories and collection of data is iterative. At step 550, the procedure is repeated for each identification experiment and results are collected and stored in respective tables or data files.

Detection and Removal of Outliers

One embodiment of the detection and removal of outliers performed at step 350 in Figure 3 will now be described in further detail. Figure 6 is a flowchart representing one embodiment of the process of detection and removal of outliers.

As a result of possible malfunctions in sensors or in the data acquisition system, experimental data may have outliers. Outliers are defined as input/output pairs of signals that do not correspond to normal operation of the system 110 of Figure 1. For example, with respect to a disk drive, errors in the gray code or in the servo burst readings may generate erroneous sensor readings in the position error signal (PES).

Outliers are identified using a linear prediction or smoothing filter. The linear filter is based on a linear model of a low order. As shown in the flowchart of Figure 6, at step 610, the linear model is constructed and an error signal $e(t)$ is computed as a difference between a predicted output signal value corresponding to the linear and the stored output signal y value obtained from the identification experiment. At step 620, a decision is made whether $e(t)$ is greater than a predetermined threshold. In one embodiment, the real-time planner automatically decides whether $e(t)$ is greater than the threshold.

Alternatively, the decision may be made by another software application or by

the system designer. If $e(t)$ is greater than the threshold, then the output signal y is declared an outlier, and its value at time t , namely $y(t)$, is stored in an outlier list at step 630. The outlier detection process is iterative for various time values between zero and t_{\max} . If $e(t)$ is lower than the threshold, then steps 620 and 630 are repeated for a different time value.

The content of the outlier list is verified at step 640. If the outlier list is empty, the data is considered clean at step 645. If the outlier list is not empty, outliers are cleaned at step 650. The cleaning procedure is used when outliers are rare. During cleaning, measured data is replaced at step 650 by the predicted output signal value corresponding to the same time value t . At step 660, a decision is made whether the cleaning procedure was successful. In one embodiment, the decision is based on a new linear prediction or smoothing filter constructed from the clean data. If the cleaning was successful, data is considered clean at step 665. Otherwise, outliers are removed at step 670.

The removal procedure typically occurs when outliers are grouped in clusters and replacement with predicted output values is not possible. At step 670, data is removed and the identification experiment is split at the removal point. At step 680, a decision is made whether the removal procedure was successful. In one embodiment, the decision is based on a new linear prediction or smoothing filter constructed from the remaining clean data. If the removal was successful, data is considered clean at step 685. Otherwise, the entire set of measured data is discarded at step 690.

Amount of Clean Data

Subsequent to the detection and removal of outliers, at step 360 in Figure 3, a decision is made whether a sufficient amount of clean data is available for further processing. In one embodiment, the real-time planner automatically decides whether the resulting clean data is sufficient for further processing. Alternatively, the decision may be made by another software application or by a system designer. If the removal was successful, but the number of removed values exceeds a predetermined percentage of the stored output signal values,

the data is discarded. As a result, the generation of reference trajectories and data collection and the detection and removal of outliers are repeated using a new set of data. If sufficient clean data is available, point model identification is performed.

5

Point Model Identification

The point model identification procedure, shown at step 370 in Figure 3, will now be described in further detail.

In one embodiment, two multi-input multi-output (MIMO) models describe each point model. These two MIMO models are an input/output model represented by a transfer function matrix G and a disturbance model represented by a transfer function matrix H . If the system is subject to periodic disturbances, a third MIMO model may be identified using fictitious sinusoidal input signals, as described in U.S. Patent Application Serial No. 09/345,166, filed June 30, 1999, entitled Adaptation to Unmeasured Variables, to Sunil C. Shah, and assigned to Voyan Technology Corporation of Santa Clara, California.

In one embodiment, the input/output model and the disturbance model are simultaneously identified from the clean data that results from step 360 in Figure 3. Alternatively, the disturbance transfer function that best explains the data is determined using a previously provided input/output model. In one embodiment, the user provides the input/output model. Alternatively, the input/output model may be obtained from previous identification experiments. The identification of the disturbance model using a stable input/output model is known and has been described in L. Ljung, *System Identification for the User*, Prentice Hall, 1999. However, this procedure requires the implementation of a filter that contains all the modes of the input/output model. When this model is unstable, the filter cannot be implemented, because it will contain the unstable modes of the input/output model. A method which circumvents this

obstacle and enables the identification of disturbance models when the input/output model is unstable will be described in detail below.

Let $u(t)$ and $y(t)$ be the input and output signals to a linear system M . Then, the linear system M is characterized by the following expression:

$$M: y(t) = G(q)u(t) + H(q)e(t)$$

where G and H are linear transfer functions, $e(t)$ is a unit covariance white noise signal, t is the sample index, and q is a delay operator. Transfer function G relates to the input/output model, while transfer function H corresponds to the disturbance model. If G is unstable, then it can be factored as a product of two transfer functions:

$$G(q) = G_u^{-1}(q)G_s(q)$$

where G_u^{-1} includes all the unstable modes of G , G_s includes all the stable modes of G , and both G_u and G_s are stable transfer functions.

Following standard system identification procedures, the prediction error associated with the above $y(t)$ expression is computed as follows:

$$e(t) = H^{-1}[y(t) - G(q)u(t)] = H^{-1}v$$

Since G is known, then all components of signal v are known. However, because G is unstable, v cannot be computed using the above equation.

Therefore, the two stable transfer functions G_u and G_s must be used in the computation as follows:

$$\begin{aligned} e(t) &= H^{-1}[y(t) - G_u^{-1}(q)G_s(q)u(t)] \\ &= H^{-1}G_u^{-1}[G_u y(t) - G_s(q)u(t)] = \tilde{H}^{-1}\tilde{v} \end{aligned}$$

where $\tilde{H} = G_u H$ and $\tilde{v} = G_u y(t) - G_s(q)u(t)$.

The above equation represents a system with no control or external input. Typically, these systems are described by either an AR model structure

or an ARMA model structure depending on the parameterization chosen for \tilde{H} .

Let p be the number of output signals and r the number of input signals.

The signal $\tilde{v} = G_u y(t) - G_s(q)u(t)$ is computed based on G_u and G_s . \tilde{H} is then

5 obtained considering an AR model structure or an ARMA model structure.

1. Using an AR model structure: A_1, \dots, A_n are identified, where

$A_i \in \mathbb{R}^{p \times p}$, such that

$$\tilde{v}(t) = e(t) - A_1 \tilde{v}(t-1) - \dots - A_n \tilde{v}(t-n) = e(t) - [A_1 \dots A_n] \begin{bmatrix} \tilde{v}(t-1) \\ \vdots \\ \tilde{v}(t-n) \end{bmatrix}$$

10

The above equation is solved for matrices A_i , $i=1, \dots, n$, using a known least squares (LS) algorithm. The resulting transfer function is

$$\tilde{H}(q) = [I + A_1 q^{-1} + \dots + A_n q^{-n}]^{-1}$$

2. ARMA model: Identify A_1, \dots, A_n and B_0, \dots, B_m , where $A_i \in \mathbb{R}^{p \times p}$

15

and $B_i \in \mathbb{R}^{p \times p}$, such that

$$\tilde{v}(t) = B_0 e(t) + \dots + B_m e(t-m) - A_1 \tilde{v}(t-1) - \dots - A_n \tilde{v}(t-n)$$

The ARMA model is obtained after an iterative procedure that minimizes the following cost function

$$V(\theta) := \frac{1}{N} \sum_t \|e(t)\|^2 = \frac{1}{N} \sum_t \sum_{i=1}^p e_i^2(t)$$

20

where p is the number of outputs of the MIMO system, and

$\theta = [A_1 \dots A_n B_0 \dots B_m]$. The resulting transfer function is

$$\tilde{H}(q) = [I + A_1 q^{-1} + \dots + A_n q^{-n}]^{-1} [B_0 + \dots + B_m q^{-m}]$$

Finally, the disturbance model is reconstructed as $H = G_u^{-1} \tilde{H}$.

Uncertainty Computation

Subsequent to point model identification, uncertainty bounds corresponding to each of the transfer functions G and H introduced above are computed. One embodiment of the computation of the uncertainty bounds has been described in detail in U.S. Patent Application Serial No. 09/345,640, filed June 30, 1999, entitled Model Error Bounds for Identification of Stochastic Models for Control Design, to Sunil C. Shah, and assigned to Voyan Technology Corporation of Santa Clara, California.

Model Qualification

Subsequent to the uncertainty computation, a decision is made whether the model obtained is accurate. In one embodiment, a model qualification procedure is performed and the real-time planner evaluates the accuracy of the model. Alternatively, the decision may be made by another software application. In another alternate embodiment, a system designer may decide whether the model is accurate or not. One embodiment of the model qualification procedure will now be described in further detail.

Figure 7 is a flowchart representing one embodiment of the model qualification procedure, i.e. a process of verification of the model accuracy. Referring to Figure 7, several tests are performed in order to qualify the model. In one embodiment, the real-time planner makes decisions related to the test results and the accuracy of the model. Alternatively, the system designer may decide whether the test results show that the model is accurate.

An analysis of the statistical properties of innovation signals is performed at step 710. If the innovation signals are white stochastic signals, (uncorrelated with past measurements), then the model is accurate. This model test is described in L. Ljung, *System Identification for the User*, Prentice Hall, 1999. At step 720, a decision is made whether the test performed at step 710 was successful. If the test was successful, quiet run data is analyzed at step 730. If

the test was not successful, then the identification experiment must be refined at step 395.

The analysis of data collected during the quiet run is performed at step 730. Frequency domain identification techniques are not consistent for closed loop identification. However, the accuracy of the model obtained can be qualified by comparing it with a transfer function estimate, computed as a ratio of system input and system output spectral estimates. Specifically, the spectral estimates obtained from quiet run are used to avoid confusion with the spectral modes injected by the reference signal in the excited run. The closed loop system is assumed to be excited by large disturbances. At step 740, a decision is made whether the model explains the quiet run data. If prominent features observed in the spectral estimates obtained from the quiet run are present in the model, then the model is considered accurate and it is said that the model explains the quiet run data. If not, the identification experiment must be refined at step 395 and the model order has to be increased in order to account for system dynamics not captured by the model.

If the model explains the quiet run data, then analysis of model error bounds is performed at step 750. Frequency regions corresponding to large model errors are detected and analyzed. If such frequency regions can be detected at step 760, then the identification experiment must be refined at step 395 and the reference signal may be modified by increasing the sweep time corresponding to those frequency regions. If such frequency regions cannot be detected, then the identification is considered successful at step 770.

Refinement of Identification Experiment

Finally, subsequent to model qualification, the refinement of the identification experiment is performed at step 395 in Figure 3. In one embodiment, the main variables available for refinement are the model order, the total time length of experimental data, i.e. the number of identification experiments, and the excitation signal. In one embodiment, the cost needed by the real-time planner to make a decision is computed. For example, performing

new experiments has a high equipment time cost, while increasing the order of the model results in an increase in the total computational cost. The calculated costs are evaluated based on *a priori* estimates and data gathered in the steps described above.

- 5 In one embodiment, once the model is assessed as accurate, the entire process is repeated for each available point model in the point model list.

CLAIMS

What is claimed is:

- 1 1. A method for automated system identification comprising:
2 selecting a model structure;
3 generating at least one reference signal for input into a system;
4 retrieving a plurality of input signals and a plurality of output signals
5 from said system;
6 performing system identification on said model structure using said
7 plurality of input signals, said plurality of output signals, and said at least one
8 reference signal to obtain a point model; and
9 verifying accuracy of said point model.
- 1 2. The method according to claim 1, further comprising:
2 calculating a cost vector for said model structure; and
3 selecting a model order based on said cost vector associated with said
4 model structure.
- 1 3. The method according to claim 2, wherein said model structure
2 includes at least one model parameter.
- 1 4. The method according to claim 1, further comprising:
2 providing at least one operating condition for said system;
3 providing a sampling frequency and a frequency bandwidth covered by
4 said model structure; and

5 defining a plurality of identification experiments according to said at
6 least one operating condition, said sampling frequency, and said frequency
7 bandwidth.

1 5. The method according to claim 4, wherein said model structure
2 includes a plurality of experimental parameters determined by said plurality of
3 identification experiments.

1 6. The method according to claim 1, further comprising verifying
2 linearity of said system and detecting non-linear manifestations of said system.

1 7. The method according to claim 1, further comprising storing said
2 at least one reference signal into a reference table and storing said plurality of
3 input signals and said plurality of output signals into an input/output table.

1 8. The method according to claim 1, wherein said model structure is
2 selected from a group consisting of finite impulse response (FIR),
3 autoregressive with external input (ARX), autoregressive moving average with
4 external input (ARMAX), autoregressive moving average (ARMA),
5 autoregressive autoregressive with external input (ARARX), autoregressive
6 autoregressive moving average with external input (ARARMAX), output error
7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 9. The method according to claim 4, further comprising:
2 performing each identification experiment of said plurality of
3 identification experiments in said system; and

4 obtaining said plurality of input signals and said plurality of output
5 signals from said each identification experiment.

1 10. The method according to claim 1, wherein said reference signal is
2 selected from a group consisting of a chirp signal, a pseudo random binary
3 sequence, a sum of sinusoids, and a wavelet.

1 11. The method according to claim 1, wherein said reference signal is
2 generated to obtain a large output signal-to-noise ratio and to guarantee a
3 linear operation regime for said point model.

1 12. The method according to claim 1, further comprising:
2 automatically detecting at least one outlier value in said plurality of
3 output signals; and
4 removing said at least one outlier value from said plurality of output
5 signals.

1 13. The method according to claim 12, further comprising replacing
2 said at least one outlier value with a predetermined value calculated using a
3 filter.

1 14. The method according to claim 12, wherein said detecting further
2 comprises:
3 building a filter using said plurality of input signals and said plurality of
4 output signals;
5 computing said at least one outlier value using said filter;

6 comparing said at least one outlier value with a predetermined threshold
7 value; and
8 storing said at least one outlier value if said at least one outlier value is
9 greater than said predetermined threshold value.

1 15. The method according to claim 14, wherein said detecting
2 requires a plurality of iterations, each iteration being related to a time value.

1 16. The method according to claim 1, wherein said performing further
2 comprises identifying an input/output model and a disturbance model within
3 said point model.

1 17. The method according to claim 16, wherein said input/output
2 model is unstable and said disturbance model is determined using said
3 input/output model.

1 18. The method according to claim 16, further comprising calculating
2 an input/output uncertainty parameter within said input/output model, and
3 calculating a disturbance uncertainty parameter within said disturbance model.

1 19. The method according to claim 1, wherein said verifying further
2 comprises analyzing whether a plurality of innovation signals, derived from
3 said plurality of output signals, are white stochastic signals uncorrelated with
4 past measurements.

1 20. The method according to claim 2, wherein said verifying further
2 comprises analyzing said plurality of input signals and said plurality of output

3 signals retrieved using a value of zero for said at least one reference signal and
4 increasing said model order to account for unrepresented system dynamics.

1 21. The method according to claim 18, wherein said verifying further
2 comprises analyzing frequency regions corresponding to said input/output
3 uncertainty parameter and said disturbance uncertainty parameter and
4 modifying said at least one reference signal by increasing a sweep time
5 corresponding to said frequency regions.

1 22. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for automated system identification comprising:
4 selecting a model structure;
5 generating at least one reference signal for input into a system;
6 retrieving a plurality of input signals and a plurality of output signals
7 from said system;
8 performing system identification on said model structure using said
9 plurality of input signals, said plurality of output signals, and said at least one
10 reference signal to obtain a point model; and
11 verifying accuracy of said point model.

1 23. The computer readable medium according to claim 22, wherein
2 said method further comprises:
3 calculating a cost vector for said model structure; and
4 selecting a model order based on said cost vector associated with said
5 model structure.

1 24. The computer readable medium according to claim 23, wherein
2 said model structure includes at least one model parameter.

1 25. The computer readable medium according to claim 22, wherein
2 said method further comprises:
3 providing at least one operating condition for said system;
4 providing a sampling frequency and a frequency bandwidth covered by
5 said model structure; and
6 defining a plurality of identification experiments according to said at
7 least one operating condition, said sampling frequency, and said frequency
8 bandwidth.

1 26. The computer readable medium according to claim 25, wherein
2 said model structure includes a plurality of experimental parameters
3 determined by said plurality of identification experiments.

1 27. The computer readable medium according to claim 22, wherein
2 said method further comprises verifying linearity of said system and detecting
3 non-linear manifestations of said system.

1 28. The computer readable medium according to claim 22, wherein
2 said method further comprises storing said at least one reference signal into a
3 reference table and storing said plurality of input signals and said plurality of
4 output signals into an input/output table.

1 29. The computer readable medium according to claim 22, wherein
2 said model structure is selected from a group consisting of finite impulse

3 response (FIR), autoregressive with external input (ARX), autoregressive
4 moving average with external input (ARMAX), autoregressive moving average
5 (ARMA), autoregressive autoregressive with external input (ARARX),
6 autoregressive autoregressive moving average with external input
7 (ARARMAX), output error (OE), Box-Jenkins (BJ), and Ordinary Differential
8 Equations (ODE).

1 30. The computer readable medium according to claim 25, wherein
2 said method further comprises:
3 performing each identification experiment of said plurality of
4 identification experiments in said system; and
5 obtaining said plurality of input signals and said plurality of output
6 signals from said each identification experiment.

1 31. The computer readable medium according to claim 22, wherein
2 said reference signal is selected from a group consisting of a chirp signal, a
3 pseudo random binary sequence, a sum of sinusoids, and a wavelet.

1 32. The computer readable medium according to claim 22, wherein
2 said reference signal is generated to obtain maximum output signal-to-noise
3 ratio and to guarantee a linear operation regime for said point model.

1 33. The computer readable medium according to claim 22, wherein
2 said method further comprises:
3 automatically detecting at least one outlier value in said plurality of
4 output signals; and

5 removing said at least one outlier value from said plurality of output
6 signals.

1 34. The computer readable medium according to claim 33, wherein
2 said method further comprises replacing said at least one outlier value with a
3 predetermined value calculated using a filter.

1 35. The computer readable medium according to claim 33, wherein
2 said detecting further includes:
3 building a filter using said plurality of input signals and said plurality of
4 output signals;
5 computing said at least one outlier value using said filter;
6 comparing said at least one outlier value with a predetermined threshold
7 value; and
8 storing said at least one outlier value if said at least one outlier value is
9 greater than said predetermined threshold value.

1 36. The computer readable medium according to claim 35, wherein
2 said detecting requires a plurality of iterations, each iteration being related to a
3 time value.

1 37. The computer readable medium according to claim 22, wherein
2 said performing further comprises identifying an input/output model and a
3 disturbance model within said point model.

1 38. The computer readable medium according to claim 37, wherein
2 said input/output model is unstable and said disturbance model is determined
3 using said input/output model.

1 39. The computer readable medium according to claim 37, wherein
2 said method further comprises calculating an input/output uncertainty
3 parameter within said input/output model, and calculating a disturbance
4 uncertainty parameter within said disturbance model.

1 40. The computer readable medium according to claim 22, wherein
2 said verifying further comprises analyzing whether a plurality of innovation
3 signals, derived from said plurality of output signals, are white stochastic
4 signals uncorrelated with past measurements.

1 41. The computer readable medium according to claim 23, wherein
2 said verifying further comprises analyzing said plurality of input signals and
3 said plurality of output signals retrieved using a value of zero for said at least
4 one reference signal and increasing said model order to account for
5 unrepresented system dynamics.

1 42. The computer readable medium according to claim 39, wherein
2 said verifying further comprises analyzing frequency regions corresponding to
3 said input/output uncertainty parameter and said disturbance uncertainty
4 parameter and modifying said at least one reference signal by increasing a
5 sweep time corresponding to said frequency regions.

43. An article of manufacture comprising a program storage medium readable by a computer and tangibly embodying at least one program of instructions executable by said computer to perform a method for automated system identification, said method comprising:

- selecting a model structure;
- generating at least one reference signal for input into a system;
- retrieving a plurality of input signals and a plurality of output signals from said system;
- performing system identification on said model structure using said plurality of input signals, said plurality of output signals, and said at least one reference signal to obtain a point model; and
- verifying accuracy of said point model.

44. The article of manufacture according to claim 43, wherein said method further comprises:

- calculating a cost vector for said model structure; and
- selecting a model order based on said cost vector associated with said model structure.

45. The article of manufacture according to claim 44, wherein said model structure includes at least one model parameter.

46. The article of manufacture according to claim 43, wherein said method further comprises:

- providing at least one operating condition for said system;
- providing a sampling frequency and a frequency bandwidth covered by said model structure; and

6 defining a plurality of identification experiments according to said at
7 least one operating condition, said sampling frequency, and said frequency
8 bandwidth.

1 47. The article of manufacture according to claim 46, wherein said
2 model structure includes a plurality of experimental parameters determined by
3 said plurality of identification experiments.

1 48. The article of manufacture according to claim 43, wherein said
2 method further comprises verifying linearity of said system and detecting non-
3 linear manifestations of said system.

1 49. The article of manufacture according to claim 43, wherein said
2 method further comprises storing said at least one reference signal into a
3 reference table and storing said plurality of input signals and said plurality of
4 output signals into an input/output table.

1 50. The article of manufacture according to claim 43, wherein said
2 model structure is selected from a group consisting of finite impulse response
3 (FIR), autoregressive with external input (ARX), autoregressive moving average
4 with external input (ARMAX), autoregressive moving average (ARMA),
5 autoregressive autoregressive with external input (ARARX), autoregressive
6 autoregressive moving average with external input (ARARMAX), output error
7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 51. The article of manufacture according to claim 46, wherein said
2 method further comprises:

3 performing each identification experiment of said plurality of
4 identification experiments in said system; and
5 obtaining said plurality of input signals and said plurality of output
6 signals from said each identification experiment.

1 52. The article of manufacture according to claim 43, wherein said
2 reference signal is selected from a group consisting of a chirp signal, a pseudo
3 random binary sequence, a sum of sinusoids, and a wavelet.

1 53. The article of manufacture according to claim 43, wherein said
2 reference signal is generated to obtain maximum output signal-to-noise ratio
3 and to guarantee a linear operation regime for said point model.

1 54. The article of manufacture according to claim 43, wherein said
2 method further comprises:
3 automatically detecting at least one outlier value in said plurality of
4 output signals; and
5 removing said at least one outlier value from said plurality of output
6 signals.

1 55. The article of manufacture according to claim 54, wherein said
2 method further comprises replacing said at least one outlier value with a
3 predetermined value calculated using a filter.

1 56. The article of manufacture according to claim 54, wherein said
2 detecting further includes:

3 derived from said plurality of output signals, are white stochastic signals
4 uncorrelated with past measurements.

1 62. The article of manufacture according to claim 44, wherein said
2 verifying further comprises analyzing said plurality of input signals and said
3 plurality of output signals retrieved using a value of zero for said at least one
4 reference signal and increasing said model order to account for unrepresented
5 system dynamics.

1 63. The article of manufacture according to claim 60, wherein said
2 verifying further comprises analyzing frequency regions corresponding to said
3 input/output uncertainty parameter and said disturbance uncertainty
4 parameter and modifying said at least one reference signal by increasing a
5 sweep time corresponding to said frequency regions.

1 64. A method for automated system identification comprising:
2 qualifying a system;
3 performing an identification experiment procedure on said system to
4 obtain a plurality of input signal values and a plurality of output signal values;
5 filtering said plurality of output signal values to obtain point model data;
6 and
7 validating a point model obtained using said point model data.

1 65. The method according to claim 64, wherein said qualifying further
2 comprises:
3 calculating a cost vector associated with each model structure of a
4 plurality of model structures for said system;

5 selecting one model structure based on said associated cost vector; and
6 selecting a model order based on said one model structure and said
7 associated cost vector.

1 66. The method according to claim 65, wherein said calculating
2 further comprises calculating said cost vector as a function of a risk of local
3 minima factor, characteristic to said system, a computational cost factor,
4 characteristic to said model structure, and an equipment time factor related to a
5 number of identification experiments necessary to obtain said point model.

1 67. The method according to claim 65, further comprising
2 transmitting said cost vector to a real-time planner module for selection of said
3 one model structure.

1 68. The method according to claim 65, further comprising
2 transmitting said cost vector to a user for selection of said one model structure.

1 69. The method according to claim 65, further comprising
2 transmitting said cost vector to a processing module for selection of said one
3 model structure.

1 70. The method according to claim 65, wherein said one model
2 structure selected further includes at least one model parameter.

1 71. The method according to claim 65, wherein said qualifying further
2 comprises:
3 providing at least one operating condition for said system;

4 providing a sampling frequency and a frequency bandwidth covered by
5 said one model structure selected; and
6 defining a plurality of identification experiments according to said at
7 least one operating condition, said sampling frequency, and said frequency
8 bandwidth.

1 72. The method according to claim 71, wherein said one model
2 structure selected further includes at least one experimental parameter
3 determined by said plurality of identification experiments.

1 73. The method according to claim 64, wherein said qualifying further
2 comprises:
3 performing at least one qualification test on said system; and
4 calculating a qualification vector based on said at least one qualification
5 test.

1 74. The method according to claim 73, wherein said performing said
2 at least one qualification test further comprises:
3 injecting a first reference signal value into said system to obtain a first
4 output signal value;
5 injecting a second reference signal value, obtained by scaling said first
6 reference signal value by a predetermined factor, to obtain a second output
7 signal value; and
8 comparing said first output signal value to said second output signal
9 value to verify linearity of said system and to detect non-linear manifestations
10 of said system.

1 75. The method according to claim 65, wherein said model structure
2 is selected from a group consisting of finite impulse response (FIR),
3 autoregressive with external input (ARX), autoregressive moving average with
4 external input (ARMAX), autoregressive moving average (ARMA),
5 autoregressive autoregressive with external input (ARARX), autoregressive
6 autoregressive moving average with external input (ARARMAX), output error
7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 76. The method according to claim 73, further comprising deciding
2 whether said system is qualified based on results from said at least one
3 qualification test and terminating said qualifying if said results are outside of a
4 predetermined range.

1 77. The method according to claim 71, wherein said performing
2 further comprises:
3 generating at least one reference signal value for input into said system;
4 performing each identification experiment of said plurality of
5 identification experiments in said system using said at least one reference signal
6 value; and
7 obtaining said plurality of input signal values and said plurality of
8 output signal values from said each identification experiment performed.

1 78. The method according to claim 77, wherein said performing
2 further comprises storing said plurality of input signal values into an input
3 storage device and said plurality of output signal values into an output storage
4 device.

1 79. The method according to claim 77, wherein said generating said at
2 least one reference signal value is based on at least one model parameter
3 associated with said model structure and at least one experimental parameter
4 associated with said model structure and determined by said plurality of
5 identification experiments.

1 80. The method according to claim 77, wherein said generating said at
2 least one reference signal value produces maximum output signal-to-noise ratio
3 and guarantees a linear operation regime for said point model.

1 81. The method according to claim 77, wherein said at least one
2 reference signal includes at least one signal selected from a group consisting of

3 a chirp signal, a pseudo random binary sequence, a sum of sinusoids, and a
4 wavelet.

1 82. The method according to claim 77, wherein said performing
2 further comprises storing said at least one reference signal value into a
3 reference storage device.

1 83. The method according to claim 78, wherein said generating
2 further comprises:
3 retrieving one output signal value from said output storage device;
4 dividing said one output signal value by said at least one reference signal
5 value to obtain an input/output gain; and
6 dividing a predetermined output signal level by the input/output gain
7 to obtain a new reference signal value.

1 84. The method according to claim 77, wherein said generating is
2 iterative, being performed repetitively for each identification experiment of said
3 plurality of identification experiments.

1 85. The method according to claim 64, wherein said filtering further
2 comprises:
3 automatically detecting at least one outlier value in said plurality of
4 output signal values; and
5 removing said at least one outlier value from said plurality of output
6 signal values.

1 86. The method according to claim 85, wherein said detecting further
2 comprises:
3 constructing a filter using said plurality of input signal values and said
4 plurality of output signal values;
5 computing said at least one outlier value as a difference between a
6 predetermined output signal value corresponding to said filter and one output
7 signal value of said plurality of output signal values;
8 comparing said at least one outlier value with a predetermined threshold
9 error value; and
10 storing said at least one outlier value if said at least one outlier value is
11 greater than said predetermined threshold value.

1 87. The method according to claim 86, wherein said filtering further
2 comprises replacing said at least one outlier value with said predetermined
3 output signal value calculated using said filter.

1 88. The method according to claim 85, wherein said detecting is
2 iterative, being performed repetitively for a plurality of time values if said at
3 least one outlier value is lower than a predetermined threshold value.

1 89. The method according to claim 86, wherein said comparing is
2 automatically performed by a real-time planner.

1 90. The method according to claim 86, wherein said comparing is
2 performed by a user.

9 calculating input spectral estimates for said plurality of input signal
10 values;
11 calculating a transfer function estimate as a ratio of said output spectral
12 estimates and said input spectral estimates;
13 comparing said transfer function estimate with said point model data;
14 and
15 iteratively performing said identification experiment procedure and said
16 filtering to obtain new point model data if features of said output spectral
17 estimates and said input spectral estimates are not present in said point model
18 data.

1 95. The method according to claim 64, further comprising performing
2 an identification on said point model.

1 96. The method according to claim 95, wherein said performing of
2 said identification further comprises:
3 identifying an input/output model within said point model, said
4 input/output model being characterized by an input/output transfer function;
5 identifying a disturbance model within said point model, said
6 disturbance model being characterized by a disturbance transfer function;
7 assessing stability of said input/output model; and
8 calculating said disturbance transfer function based on said stability of
9 said input/output model.

1 97. The method according to claim 96, wherein said input/output
2 model is unstable and said calculating further comprises:

3 processing said input/output transfer function to obtain at least two
 4 stable transfer functions;
 5 calculating a prediction error associated with said system based on said
 6 at least two stable transfer functions; and
 7 calculating said disturbance transfer function using said prediction error
 8 and said at least two stable transfer functions for a predetermined model
 9 structure.

1 98. The method according to claim 97, wherein said predetermined
 2 model structure is selected from a group consisting of finite impulse response
 3 (FIR), autoregressive with external input (ARX), autoregressive moving average
 4 with external input (ARMAX), autoregressive moving average (ARMA),
 5 autoregressive autoregressive with external input (ARARX), autoregressive
 6 autoregressive moving average with external input (ARARMAX), output error
 7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 99. A method for qualification of a system comprising:
 2 calculating a cost vector associated with each model structure of a
 3 plurality of model structures for said system;
 4 selecting one model structure based on said associated cost vector; and
 5 selecting a model order based on said one model structure and said
 6 associated cost vector.

1 100. The method according to claim 99, wherein said calculating
 2 further comprises:
 3 calculating said cost vector as a function of a risk of local minima factor,
 4 characteristic to said system;

5 calculating a computational cost factor, characteristic to said model
6 structure; and
7 calculating an equipment time factor related to a number of
8 identification experiments necessary to obtain said point model.

1 101. The method according to claim 99, further comprising
2 transmitting said cost vector to a real-time planner module for selection of said
3 one model structure.

1 102. The method according to claim 99, further comprising
2 transmitting said cost vector to a user for selection of said one model structure.

1 103. The method according to claim 99, further comprising
2 transmitting said cost vector to a processing module for selection of said one
3 model structure.

1 104. The method according to claim 99, wherein said one model
2 structure selected further includes at least one model parameter.

1 105. The method according to claim 99, further comprising:
2 providing at least one operating condition for said system;
3 providing a sampling frequency and a frequency bandwidth covered by
4 said one model structure selected; and
5 defining a plurality of identification experiments according to said at
6 least one operating condition, said sampling frequency, and said frequency
7 bandwidth.

1 106. The method according to claim 105, wherein said one model
2 structure selected further includes at least one experimental parameter
3 determined by said plurality of identification experiments.

1 107. The method according to claim 99, further comprising:
2 performing at least one qualification test on said system; and
3 calculating a qualification vector based on said at least one qualification
4 test.

1 108. The method according to claim 107, wherein said performing said
2 at least one qualification test further comprises:
3 injecting a first reference signal value into said system to obtain a first
4 output signal value;
5 injecting a second reference signal value, obtained by scaling said first
6 reference signal value by a predetermined factor, to obtain a second output
7 signal value; and
8 comparing said first output signal value to said second output signal
9 value to verify linearity of said system and to detect non-linear manifestations
10 of said system.

1 109. The method according to claim 99, wherein said model structure
2 is selected from a group consisting of finite impulse response (FIR),
3 autoregressive with external input (ARX), autoregressive moving average with
4 external input (ARMAX), autoregressive moving average (ARMA),
5 autoregressive autoregressive with external input (ARARX), autoregressive
6 autoregressive moving average with external input (ARARMAX), output error
7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 110. The method according to claim 107, further comprising deciding
2 whether said system is qualified based on results from said at least one
3 qualification test and terminating said qualifying if said results are outside of a
4 predetermined range.

1 111. A method for performing an identification experiment on a
2 system comprising:
3 generating at least one reference signal value for input into said system;
4 performing each identification experiment of a plurality of identification
5 experiments in said system using said at least one reference signal value; and
6 obtaining a plurality of input signal values and a plurality of output
7 signal values from said each identification experiment performed.

1 112. The method according to claim 111, further comprising storing
2 said plurality of input signal values into an input storage device and said
3 plurality of output signal values into an output storage device.

1 113. The method according to claim 111, wherein said generating said
2 at least one reference signal value is based on at least one model parameter
3 associated with a model structure of a plurality of model structures associated
4 with said system and at least one experimental parameter associated with said
5 model structure and determined by said plurality of identification experiments.

1 114. The method according to claim 111, wherein said generating said
2 at least one reference signal value produces maximum output signal-to-noise
3 ratio and guarantees a linear operation regime for said system.

1 115. The method according to claim 111, wherein said at least one
2 reference signal includes at least one signal selected from a group consisting of
3 a chirp signal, a pseudo random binary sequence, a sum of sinusoids, and a
4 wavelet.

5 computing said at least one outlier value as a difference between a
6 predetermined output signal value corresponding to said filter and one output
7 signal value of said plurality of output signal values;
8 comparing said at least one outlier value with a predetermined threshold
9 error value; and
10 storing said at least one outlier value if said at least one outlier value is
11 greater than said predetermined threshold value.

1 121. The method according to claim 120, further comprising replacing
2 said at least one outlier value with said predetermined output signal value
3 calculated using said filter.

1 122. The method according to claim 119, wherein said detecting is
2 iterative, being performed repetitively for a plurality of time values if said at
3 least one outlier value is lower than a predetermined threshold value.

1 123. The method according to claim 120, wherein said comparing is
2 automatically performed by a real-time planner.

1 124. The method according to claim 120, wherein said comparing is
2 performed by a user.

1 125. The method according to claim 120, wherein said comparing is
2 automatically performed by a processing module.

1 126. The method according to claim 119, further comprising:

2 removing said plurality of output signal values if said at least one outlier
3 value being removed exceeds a predetermined percentage of said plurality of
4 output signal values; and
5 providing a second plurality of output signal values for further
6 processing.

1 127. A method for validating a point model obtained for a system
2 comprising:
3 generating at least one reference signal value for input into said system;
4 performing at least one identification experiment in said system using
5 said at least one reference signal value;
6 obtaining a plurality of input signal values and a plurality of output
7 signal values from said at least one identification experiment performed;
8 analyzing a plurality of innovation signal values, derived from said
9 plurality of output signal values; and
10 validating accuracy of said point model if said plurality of innovation
11 signal values corresponds to a plurality of white stochastic signal values.

1 128. The method according to claim 127, further comprising:
2 analyzing said plurality of input signal values and said plurality of
3 output signal values retrieved using a zero value for said at least one reference
4 signal value;
5 calculating output spectral estimates for said plurality of output signal
6 values;
7 calculating input spectral estimates for said plurality of input signal
8 values; and

9 calculating a transfer function estimate as a ratio of said output spectral
10 estimates and said input spectral estimates;
11 comparing said transfer function estimate with said point model; and
12 validating accuracy of said point model if features of said output spectral
13 estimates and said input spectral estimates are present in said point model.

1 129. A method for performing identification on a point model for a
2 system comprising:
3 identifying an input/output model within said point model, said
4 input/output model being characterized by an input/output transfer function;
5 identifying a disturbance model within said point model, said
6 disturbance model being characterized by a disturbance transfer function;
7 assessing stability of said input/output model; and
8 calculating said disturbance transfer function based on said stability of
9 said input/output model.

1 130. The method according to claim 129, wherein said input/output
2 model is unstable and said calculating further comprises:
3 processing said input/output transfer function to obtain at least two
4 stable transfer functions;
5 calculating a prediction error associated with said system based on said
6 at least two stable transfer functions; and
7 calculating said disturbance transfer function using said prediction error
8 and said at least two stable transfer functions for a predetermined model
9 structure.

1 131. The method according to claim 130, wherein said predetermined
2 model structure is selected from a group consisting of finite impulse response
3 (FIR), autoregressive with external input (ARX), autoregressive moving average
4 with external input (ARMAX), autoregressive moving average (ARMA),
5 autoregressive autoregressive with external input (ARARX), autoregressive
6 autoregressive moving average with external input (ARARMAX), output error
7 (OE), Box-Jenkins (BJ), and Ordinary Differential Equations (ODE).

1 132. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for automated system identification comprising:
4 qualifying a system;
5 performing an identification experiment procedure on said system to
6 obtain a plurality of input signal values and a plurality of output signal values;
7 filtering said plurality of output signal values to obtain point model data;
8 and
9 validating a point model obtained using said point model data.

1 133. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for qualification of a system comprising:
4 calculating a cost vector associated with each model structure of a
5 plurality of model structures for said system;
6 selecting one model structure based on said associated cost vector; and
7 selecting a model order based on said one model structure and said
8 associated cost vector.

1 134. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for performing an identification experiment on a system comprising:
4 generating at least one reference signal value for input into said system;
5 performing each identification experiment of a plurality of identification
6 experiments in said system using said at least one reference signal value; and
7 obtaining a plurality of input signal values and a plurality of output
8 signal values from said each identification experiment performed.

1 135. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for filtering a plurality of output signal values obtained for a system
4 comprising:
5 automatically detecting at least one outlier value in said plurality of
6 output signal values; and
7 removing said at least one outlier value from said plurality of output
8 signal values.

1 136. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for validating a point model obtained for a system comprising:
4 generating at least one reference signal value for input into said system;
5 performing at least one identification experiment in said system using
6 said at least one reference signal value;
7 obtaining a plurality of input signal values and a plurality of output
8 signal values from said at least one identification experiment performed;

9 analyzing a plurality of innovation signal values, derived from said
10 plurality of output signal values; and
11 validating accuracy of said point model if said plurality of innovation
12 signal values corresponds to a plurality of white stochastic signal values.

1 137. A computer readable medium containing executable instructions
2 which, when executed in a processing system, cause said system to perform a
3 method for performing identification on a point model for a system comprising:
4 identifying an input/output model within said point model, said
5 input/output model being characterized by an input/output transfer function;
6 identifying a disturbance model within said point model, said
7 disturbance model being characterized by a disturbance transfer function;
8 assessing stability of said input/output model; and
9 calculating said disturbance transfer function based on said stability of
10 said input/output model.

1

ABSTRACT

A method for automated system identification of a linear system is disclosed. A model structure is selected and one or more reference signal values are generated for input into the system. Input signal values and output
5 signal values are retrieved from the system and system identification is performed on the model structure using the input signal values, the output signal values, and the one or more reference signal values. A point model, obtained as a result of the system identification, is then verified for accuracy.

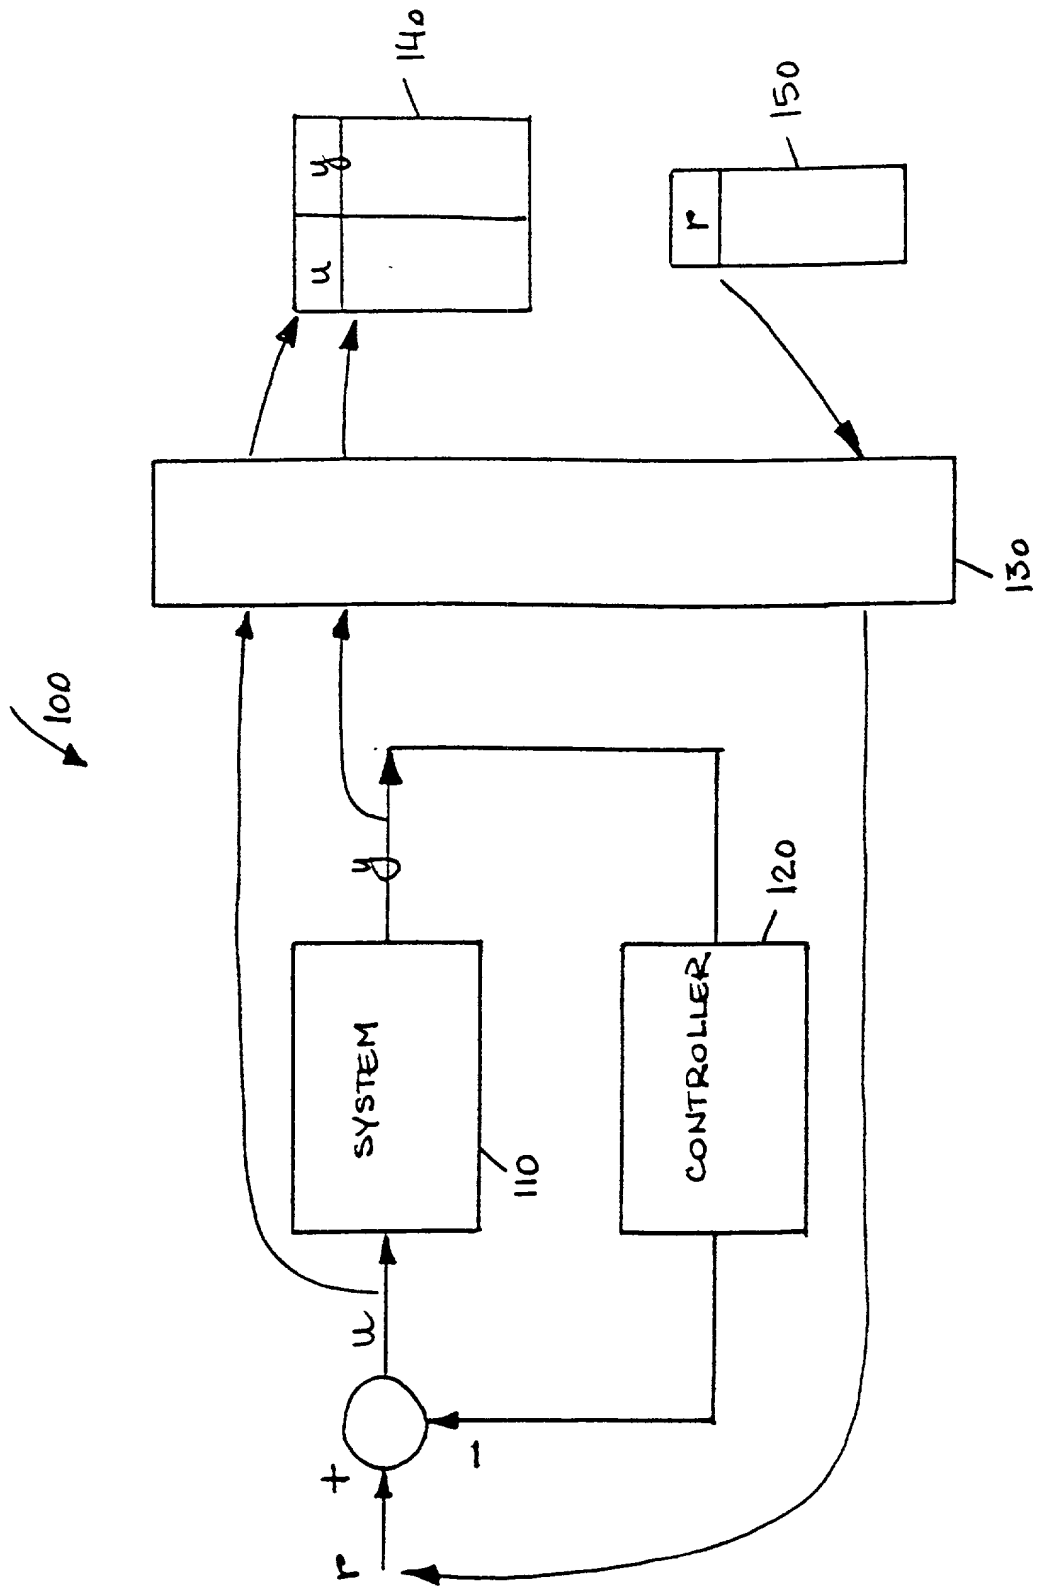


Fig. 1

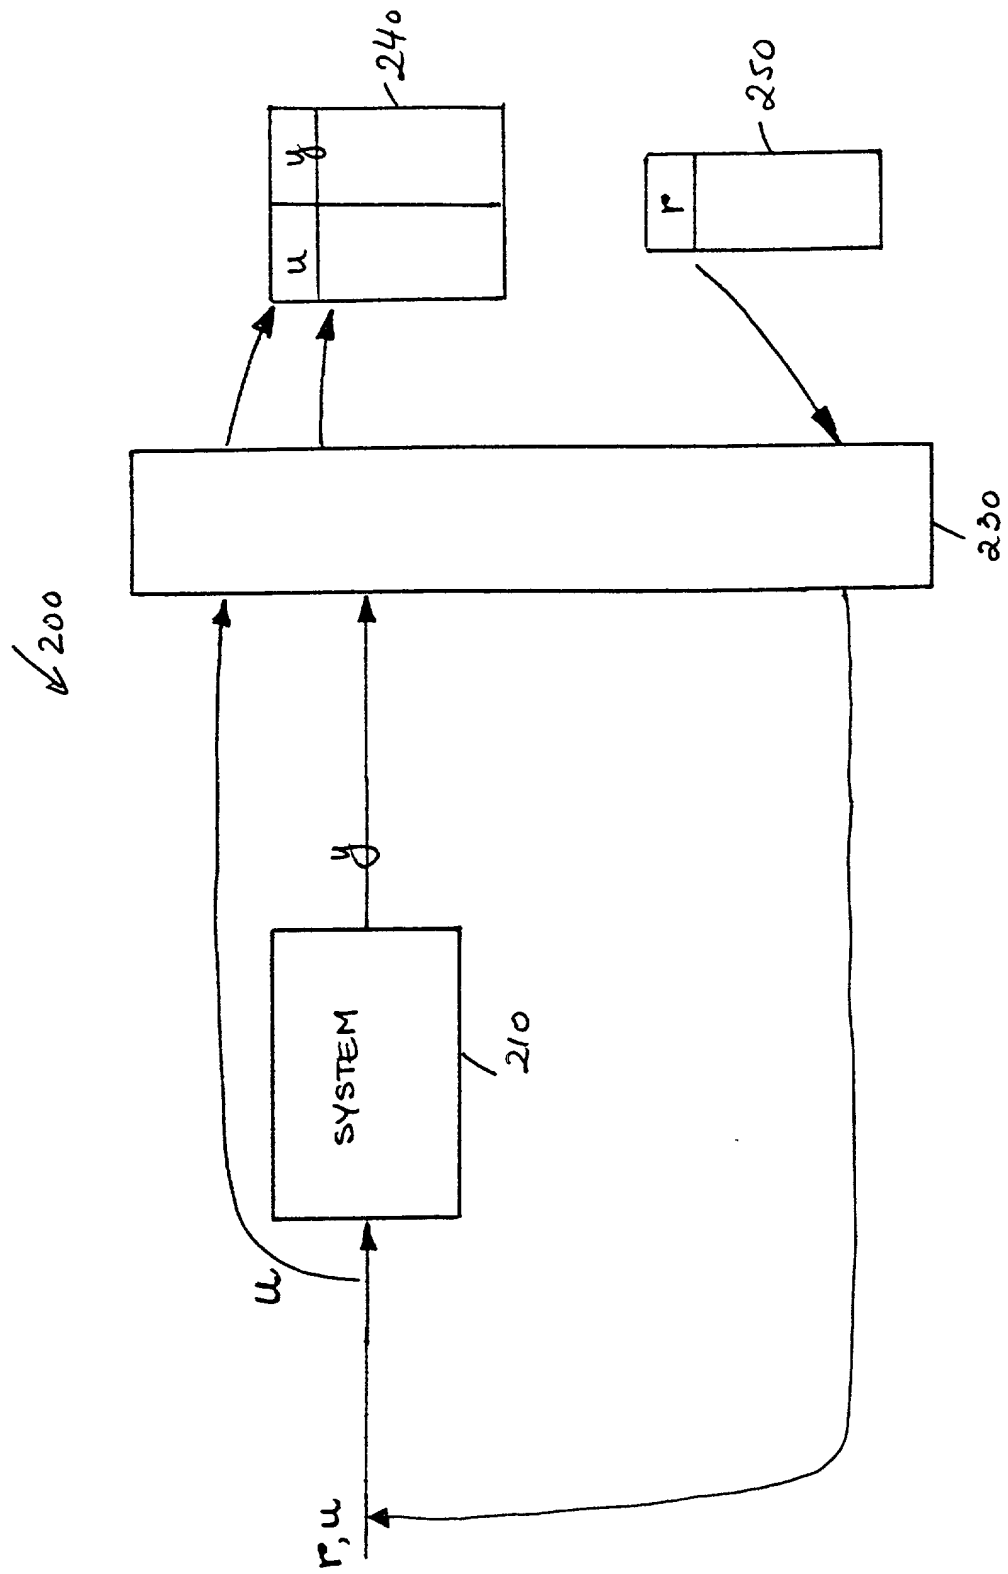


Fig. 2

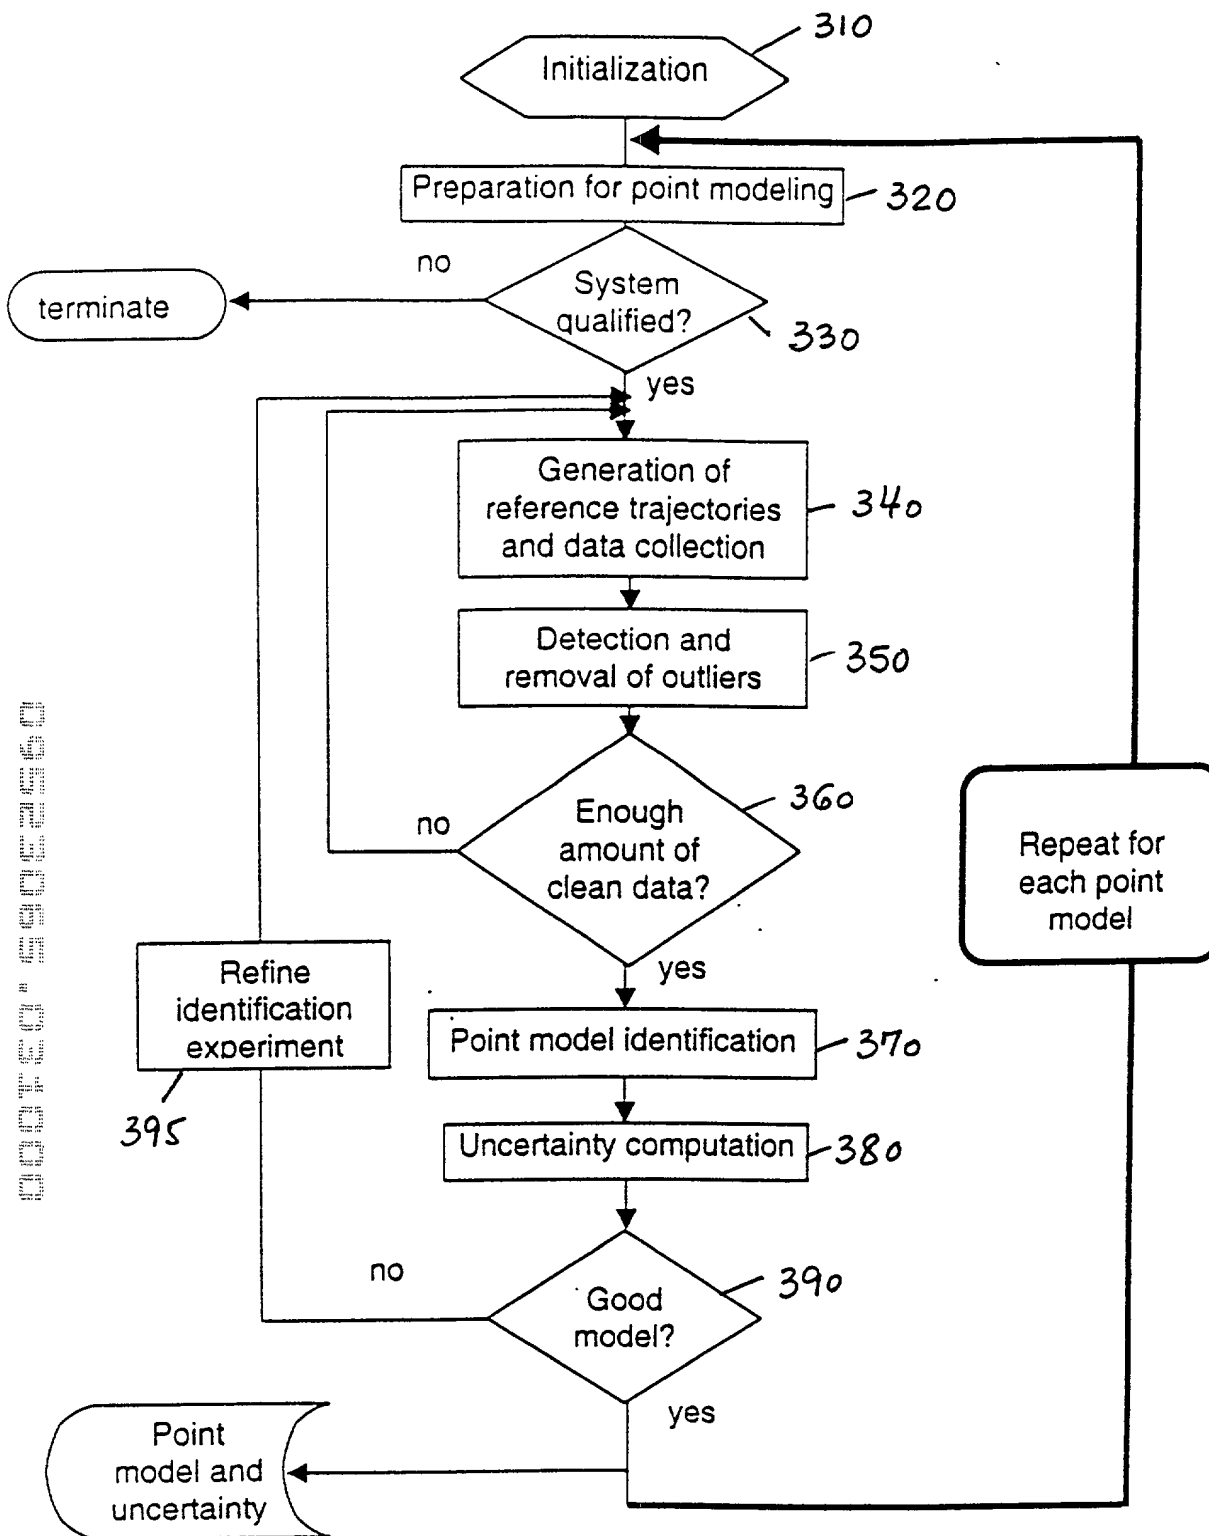


Fig. 3

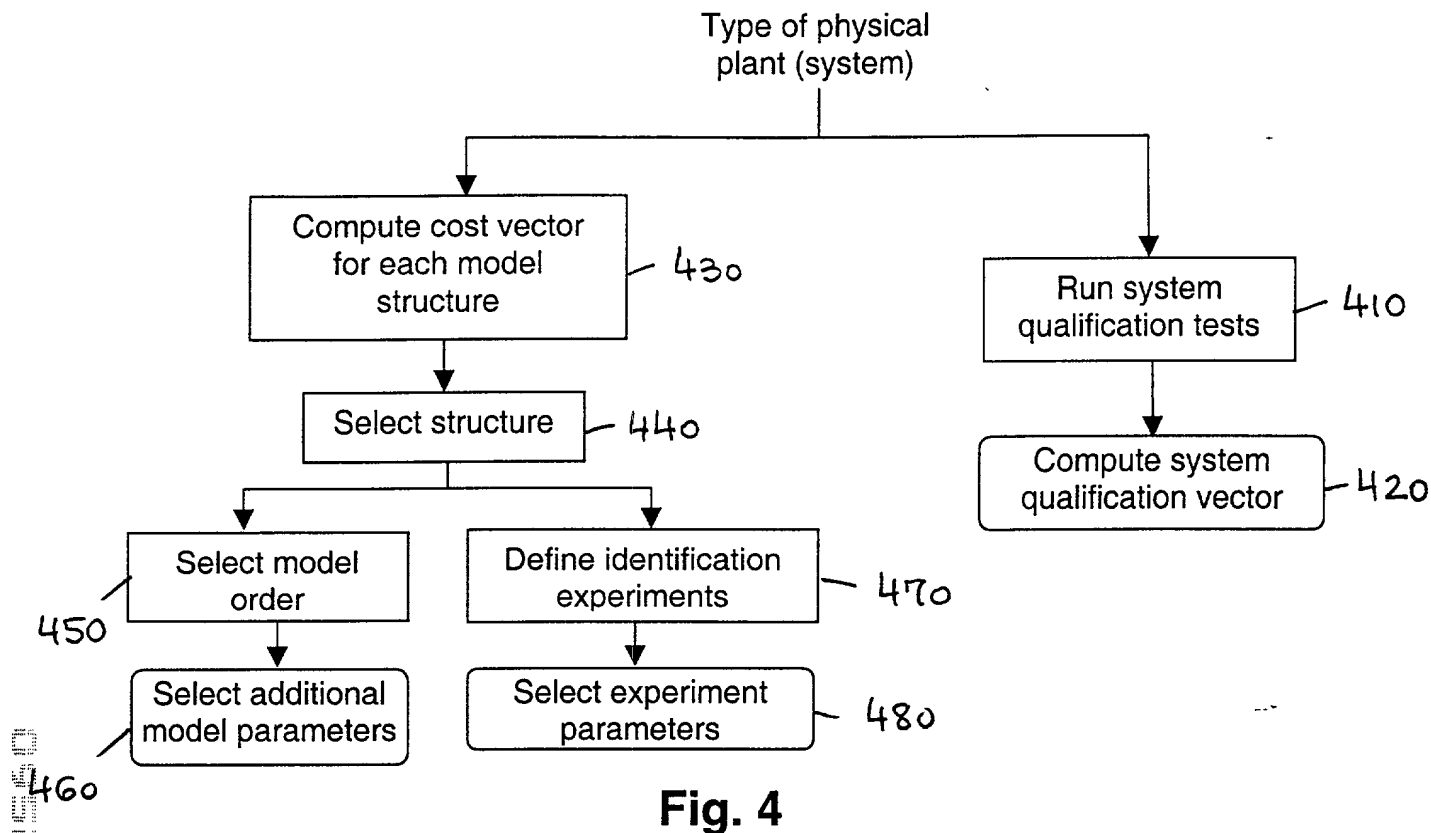


Fig. 4

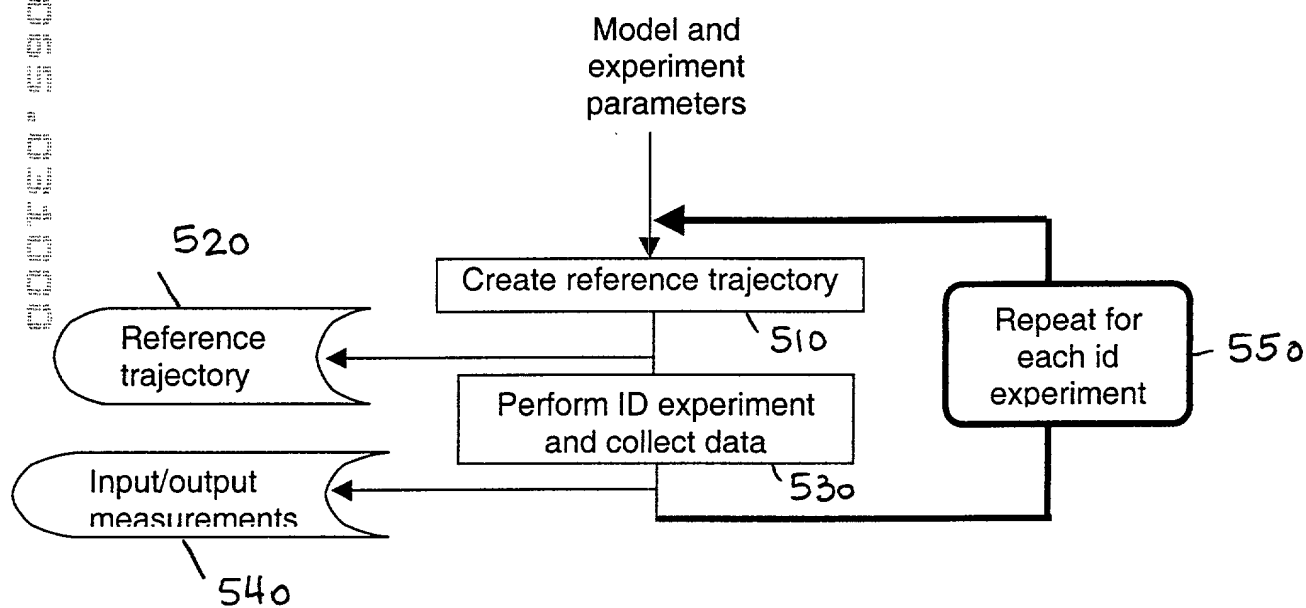


Fig. 5

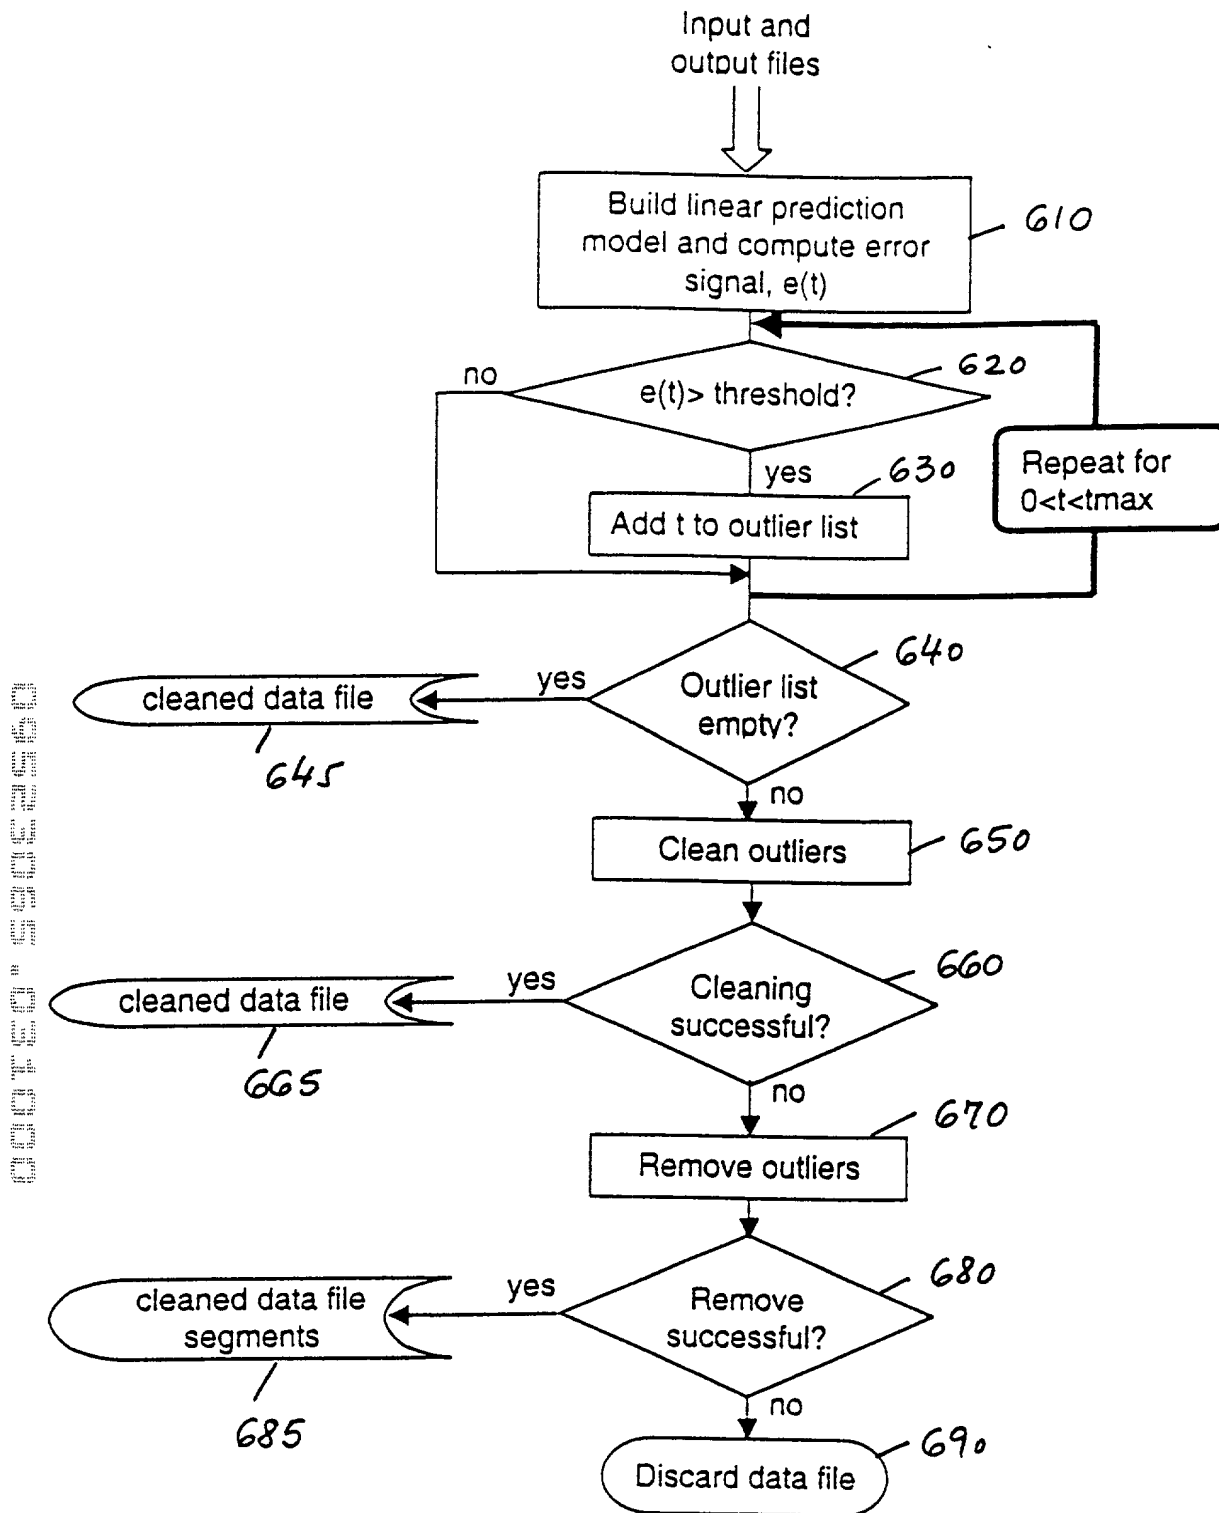


Fig. 6

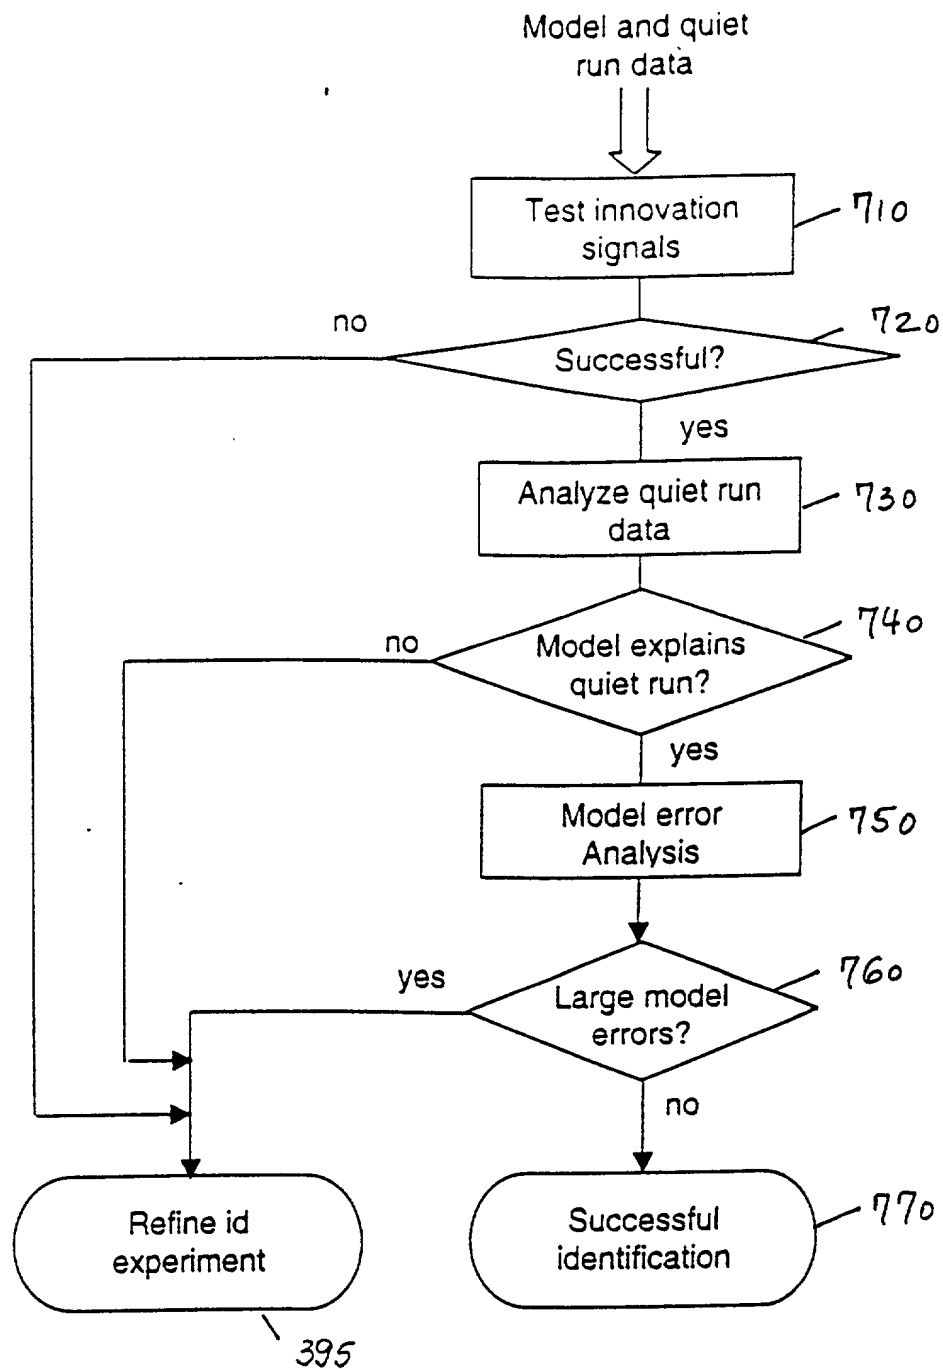


Fig. 7

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD FOR AUTOMATED SYSTEM IDENTIFICATION

the specification of which

 x is attached hereto.

 was filed on _____ as

United States Application Number _____

or PCT International Application Number _____

and was amended on _____.

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
<u>Number</u>	<u>Country</u>	<u>Day/Month/Year Filed</u>	<u>Yes</u>	<u>No</u>
_____	_____	_____	<u>Yes</u>	<u>No</u>
_____	_____	_____	<u>Yes</u>	<u>No</u>
_____	_____	_____	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

_____	_____
Application Number	Filing Date
_____	_____
Application Number	Filing Date

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Number	Filing Date	Status -- patented, pending, abandoned


Application Number	Filing Date	Status -- patented, pending, abandoned

I hereby appoint the persons listed on Appendix A hereto (which is incorporated by reference and a part of this document) as my respective patent attorneys and patent agents, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Florin Corie, BLAKELY, SOKOLOFF, TAYLOR &
(Name of Attorney or Agent)
ZAFMAN LLP, 12400 Wilshire Boulevard 7th Floor, Los Angeles, California 90025 and direct
telephone calls to Florin Corie, (408) 720-8300.
(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Full Name of Sole/First Inventor Cecilia Galarza

Inventor's Signature  Date 3/10/2000

Residence San Francisco, California Citizenship Argentina
(City, State) (Country)

Post Office Address 39 Boardman Place #204
San Francisco, California 94103

Full Name of Second/Joint Inventor Dan Hernandez

Inventor's Signature  Date 3/10/00

Residence Cupertino California Citizenship U.S.A.
(City, State) (Country)

Post Office Address 20425 Via Pavisio # D12
Cupertino California 95014

Full Name of Third/Joint Inventor Mark Erickson

Inventor's Signature *Mark Erickson* Date 3/10/00

Residence San Bruno, California Citizenship U.S.A
(City, State) (Country)

Post Office Address 214 Linden Avenue
San Bruno, California 94066

APPENDIX A

William E. Alford, Reg. No. 37,764; Farzad E. Amini, Reg. No. P42,261; Aloysius T. C. AuYeung, Reg. No. 35,432; William Thomas Babbitt, Reg. No. 39,591; Carol F. Barry, Reg. No. 41,600; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Bereznak, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Gregory D. Caldwell, Reg. No. 39,926; Ronald C. Card, Reg. No. 44,587; Andrew C. Chen, Reg. No. 43,544; Thomas M. Coester, Reg. No. 39,637; Florin Corie, Reg. No. P46,244; Dennis M. deGuzman, Reg. No. 41,702; Stephen M. De Klerk, under 37 C.F.R. § 10.9(b); Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Robert Andrew Diehl, Reg. No. 40,992; Sanjeet Dutta, Reg. No. P46,145; Matthew C. Fagan, Reg. No. 37,542; Tarek N. Fahmi, Reg. No. 41,402; Paramita Ghosh, Reg. No. 42,806; James Y. Go, Reg. No. 40,621; James A. Henry, Reg. No. 41,064; Willmore F. Holbrow III, Reg. No. P41,845; Sheryl Sue Holloway, Reg. No. 37,850; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; William W. Kidd, Reg. No. 31,772; Sang Hui Kim, Reg. No. 40,450; Eric T. King, Reg. No. 44,188; Erica W. Kuo, Reg. No. 42,775; Kurt P. Leyendecker, Reg. No. 42,799; Michael J. Mallie, Reg. No. 36,591; Andre L. Marais, under 37 C.F.R. § 10.9(b); Paul A. Mendonsa, Reg. No. 42,879; Darren J. Milliken, Reg. No. 42,004; Lisa A. Norris, Reg. No. 44,976; Chun M. Ng, Reg. No. 36,878; Thien T. Nguyen, Reg. No. 43,835; Thinh V. Nguyen, Reg. No. 42,034; Dennis A. Nicholls, Reg. No. 42,036; Daniel E. Ovanezian, Reg. No. 41,236; Marina Portnova, Reg. No. P45,750; Babak Redjaian, Reg. No. 42,096; William F. Ryann, Reg. No. 44,313; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Jeffrey Sam Smith, Reg. No. 39,377; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. 42,179; Edwin H. Taylor, Reg. No. 25,129; John F. Travis, Reg. No. 43,203; George G. C. Tseng, Reg. No. 41,355; Joseph A. Twarowski, Reg. No. 42,191; Lester J. Vincent, Reg. No. 31,460; Glenn E. Von Tersch, Reg. No. 41,364; John Patrick Ward, Reg. No. 40,216; Mark L. Watson, Reg. No. P46,322; Thomas C. Webster, Reg. No. P46,154; Charles T. J. Weigell, Reg. No. 43,398; Kirk D. Williams, Reg. No. 42,229; James M. Wu, Reg. No. 45,241; Steven D. Yates, Reg. No. 42,242; and Norman Zafman, Reg. No. 26,250; my patent attorneys, and Justin M. Dillon, Reg. No. 42,486; my patent agent, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, and James R. Thein, Reg. No. 31,710, my patent attorney.

APPENDIX B

Title 37, Code of Federal Regulations, Section 1.56 Duty to Disclose Information Material to Patentability

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) Prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.